



TECHNICAL DATA

Power	8 W
Operating voltage	230 V AC, 50 Hz
Type of luminaire	Recessed luminaire
LED Type	COB
Control	Push
Light efficiency	up to 93 lm/W
Colour consistency	SDCM6
Lifetime	L70 B50 40.000 h @ 25°C
Ambient temperature	-10°C to +40°C
Housing	Aluminium
Rotation / swing angle	--- / ---
Warranty	5 Years
Scope of delivery	Einbaustrahler Set consisting of: - 1 Stück 4560055: Einbaustrahler Flex, 8W, CRI90, 36° - 1 Stück 4560050: Frontring white - 1 Stück 4560053: Anti-glare-ring silver




Further information on the control gear can be found in the operating instructions belonging to this product.

TYPES

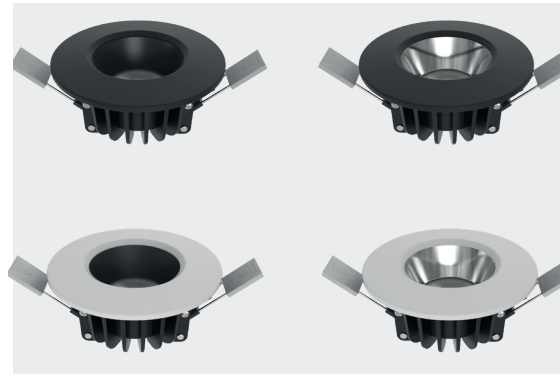


BEAM ANGLE

36°



DIMENSIONS (mm)

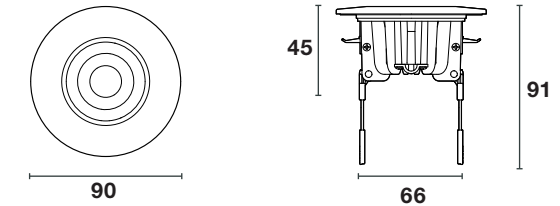

HIGHLIGHTS

- One LED, all light colors: 2700 / 3000 / 4000 / TW adjustable with only one click at the power supply!
- Light control included and with only one switch: Convenient control via push-dim and push-TW control
- Installation in record time - thanks to new "InstaClip" mechanism
- Four freely combinable housing color combinations
- Installation-friendly: connection also suitable for NYM cable suitable and through-wireable

ARTICLE OVERVIEW

Item number	Power	Colour temperature	Light colour Ledxon	CRI	Luminous flux	Beam angle	Housing colour	Reflektorfarbe	Weight
7008126	8 W	2700 K - 4000 K	2700 K - 4000 K	92	744 lm	36°	white	silver	0,27 kg
7008127	8 W	2700 K - 4000 K	2700 K - 4000 K	92	744 lm	36°	black	silver	0,27 kg
7008128	8 W	2700 K - 4000 K	2700 K - 4000 K	92	744 lm	36°	white	black	0,27 kg
7008129	8 W	2700 K - 4000 K	2700 K - 4000 K	92	744 lm	36°	black	black	0,27 kg

IMPORTANT NOTES

All technical parameters apply to the entire product. Due to the complex manufacturing process of light emitting diodes, the specified typical LED parameters are only purely statistical values and may deviate.

The specified type of use must be strictly adhered to. Deviations may affect the stability of the fixture. Please observe the information in the mounting instructions before using the products.

Mercury content	0,0 mg
Mercury-free	yes
Professional disposal according to WEEE	yes

NOTES TO THE LIFE TIME

Decisive factors for the life time are the ambient temperature and the operating temperature (Tc). Exceeding the permissible limits results in a substantial reduction of the life time and can even lead to the destruction of the products. The specified life time represents a statistical quantity.

NOTES TO ELECTRICAL AND PHOTOMETRIC DATA

Colour coordinates according to CIE 1931

Rated ambient temperature: $t_a = 25^\circ$

Measuring tolerance colour coordinates (x/y) +/- 0,005

Tolerance range of electrical / photometric data: +/- 10%

DISCLAIMER

Changes and errors excepted. Due to the continuous development of all products, technical and design changes can occur at any time. Make sure that you always use the latest version of the data sheet.

WARRANTY NOTES

Please refer to our warranty conditions on:

<https://www.ledxon.de/en/guarantee/>

Further product data as well as current information can be found at www.ledxon.com