

TECHNICAL DATA

Power	23-26 W
Operating voltage	230 V AC / 50 Hz
Type of luminaire	Surface mounted luminaire / Phase track
LED Type	COB
Control	Bluetooth
Variable Beam angle	20-50°
Luminous flux class	3000 lm
Light efficiency	up to 93 lm/W
Colour consistency	3 SDCM
Lifetime	L80 B10 50.000 h @ 25°C *
Housing	Aluminium
Cooling	Passiv cooling
Rotation / swing angle	355° / 90°
Warranty	5 Years




5 YEARS
WARRANTY




Further information on the control gear can be found in the installation instructions belonging to this product.

Further information on the accessories can be found in the accessoiresdata sheet belonging to this product.


TYPES

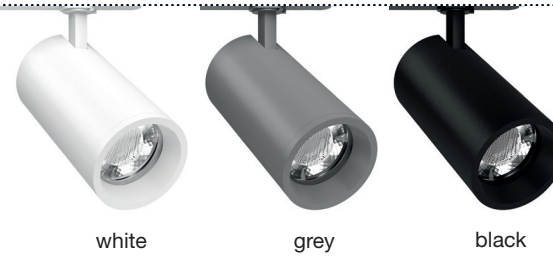

DIMENSIONS (mm)

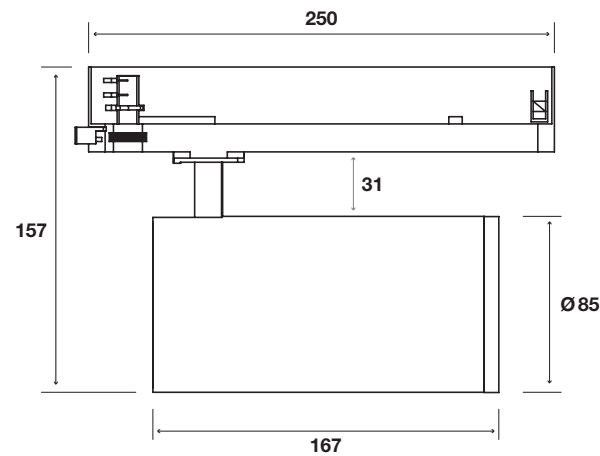

BEAM ANGLE

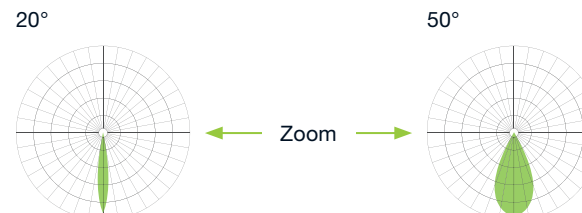

LIGHTMANAGEMENT



This product is controllable by
eyeconex LIGHTMANAGEMENT

App download:



ACCESSORIES Item-Nr.: 9000820

The SWITCH - smart operation
for your lighting concept.

FUNCTIONS

- light / dark dimming
- adjust white light (warm / cold)
- on/ off

INSTALLATION

- per magnet
- per adhesive device
- per screws and dowels



Product link

TLM2 ZOOM TW BT

.....

Product	Wattage	Light colour	CRI	Lumen	Housing colour	Beam angle 20° - 50°
TLM2-Zoom-TW-BT	23 W	2.700 K - 5.000 K	92	2087 lm	black	8102362
TLM2-Zoom-TW-BT	23 W	2.700 K - 5.000 K	92	2087 lm	white	8102363
TLM2-Zoom-TW-BT	23 W	2.700 K - 5.000 K	92	2087 lm	grey	8102364

IMPORTANT NOTES

All technical parameters apply to the entire product. Due to the complex manufacturing process of light emitting diodes, the specified typical LED parameters are only purely statistical values and may deviate.

The specified type of use must be strictly adhered to. Deviations may affect the stability of the fixture. Please observe the information in the mounting instructions before using the products.

The specified type of use must be observed. Deviations may affect the stability of the fastening. Before using the products, please observe the notes in the installation instructions.

Mercury content	0,0 mg
Mercury-free	yes
Professional disposal according to WEEE	yes

NOTES TO THE LIFE TIME

Decisive factors for the life time are the ambient temperature and the operating temperature (Tc). Exceeding the permissible limits results in a substantial reduction of the life time and can even lead to the destruction of the products. The specified life time represents a statistical quantity.

NOTES TO ELECTRICAL AND PHOTOMETRIC DATA

Colour coordinates according to CIE 1931

Rated ambient temperature: $t_a = 25^\circ$

Measuring tolerance colour coordinates (x/y) +/- 0,005

Tolerance range of electrical / photometric data: +/- 10%

DISCLAIMER

Changes and errors excepted. Due to the continuous development of all products, technical and design changes can occur at any time. Make sure that you always use the latest version of the data sheet.

WARRANTY NOTES

Please refer to our warranty conditions on:

<https://www.ledxon.de/en/guarantee/>

Further product data as well as current information can be found at www.ledxon.com